


Hyper-Cam Airborne Nano



KEY FEATURES

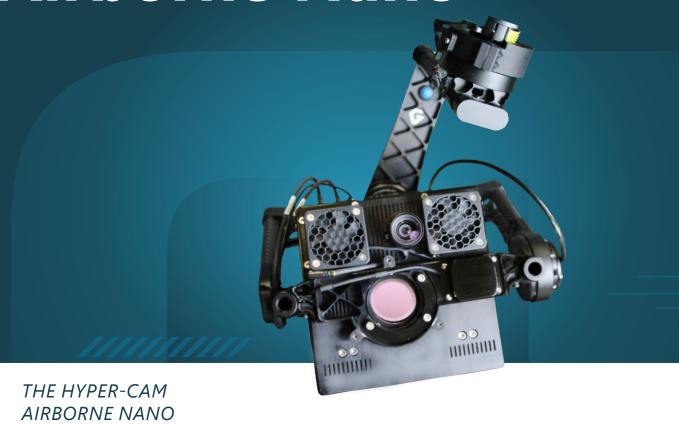

HIGH SPECTRAL RESOLUTION: DOWN TO 4 CM⁻¹



MULTI-MODE: TARGETING AND MAPPING, FORWARD LOOKING AND NADIR



TELOPS' ADVANCED PERMANENT CALIBRATION




COMPACT AND WELL ADAPTED FOR REMOTE LOCATIONS

Introducing the Hyper-Cam Airborne Nano, our smallest long-wave infrared hyperspectral imager. Engineered for airborne scientific survey applications, this ultra-compact camera sensor is seamlessly integrated into a payload gimbal tracking system for unparalleled stability and precision. The Hyper-Cam Airborne Nano brings cutting-edge hyperspectral LWIR capabilities to the skies! With Telops' permanent calibration ensuring long-term accuracy and reliability, this advanced system is the ideal solution for professionals seeking high-performance aerial hyperspectral imaging in a lightweight, versatile package.



Hyper-Cam Airborne Nano



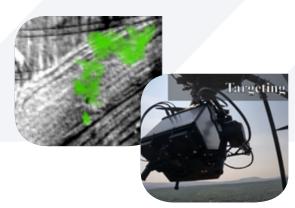

Detection of Hydrofluorocarbon-152a

KEY PERFORMANCES	VALUE	UNITS	COMMENT
Detector Format	320 x 160	pixels	
Spectral Range	7.5 – 12.4 μm	μm	
Spectral Resolution	From 4 to 64	cm ⁻¹	
Field of view (FOV)	35 x 18	degrees	
Typical NESR	≤35	nW/cm ² .sr.cm ⁻¹	At spectral resolution of 16 cm ⁻¹ . Corresponds to a NEdT of 0.2K for a 25°C at 1000 cm ⁻¹

RESISTANCE	VALUE	UNITS	COMMENT
Dimensions	172 x 172 x 181	mm	HxWxD
Weight (camera & gimbal)	< 7.5	kg	
Interface	Quick-release circular Gimbal mount attachment		
Power	<150	W	







